




Technical Data Sheet
Art. No. 4417

Quartz 02/07

Fire-dried, quartz sand mixture



Protect from
moisture

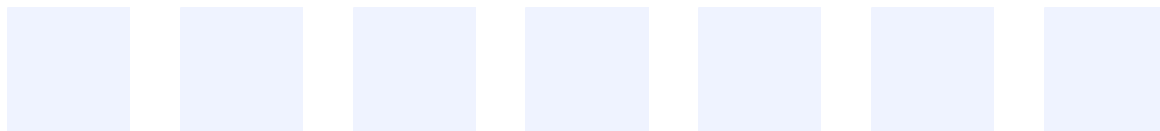

Range of use

Quartz 02/07 is used as a filler for scratch coats and for blinding fresh coatings to produce slip resistant covers.

Property profile

Special combination of washed, fire-dried quartz sand

Packaging, application rate, shelf-life

Packaging:
25 kg bags

Application rate:
Depends on application.

Shelf-life:
Unlimited shelf-life when stored dry.

Characteristic data of the product

State:	solid
Colour:	white-yellowish
Density:	2.65 g/cm ³ (grain density)
Grain:	approx. 0.2 - 0.7 mm

Safety, ecology, disposal

Further information on safety when transporting, storing and handling as well as disposal and ecology is found in the latest Safety Data Sheet.

Emergency information:

Mon.- Thurs. from 7:30 a.m. to 4:00 p.m.;
Fri. 7:30 a.m. to 2:00 p.m.
Product Safety Department:
Tel.: +49 (0)5432/83-138
After office hours:
Gif tinformati onszentrum-Nord
(Poison Centre) 24 h hotline +
49(0)551 – 19240 19240

The statements above are compiled from our field of production and according to the latest technological developments and application techniques.

Since application and working are beyond our control, no liability of the producer can be derived from the contents of this information sheet. Any statements made beyond the contents of this information must be confirmed in writing by the producer.

In all cases, our general conditions of sale are valid. With the publication of this Technical Information Sheet all previous editions are no longer valid.

4417-TDS-02.12



Remmers (UK) Limited Crawley
United Kingdom
Tel: +44(0) 845 373 0103
Fax: +44(0)845 373 0104
www.remmers.co.uk